


- EXTERIOR SLAB REPLACEMENT PROCEDURE**
1. SAW-CUT EXISTING SLAB ALONG THE LIMITS OF SLAB REPLACEMENT.
 2. DEMOLISH, REMOVE & DISPOSE OF EXISTING FLOOR SLAB & REBAR.
 3. EXCAVATE TO THE REQUIRED DEPTH AND REMOVE ALL EXCESS SOIL FROM THE SITE.
 4. PROOF-ROLE THE EXPOSED SUBGRADE.
 5. INSTALL AND COMPACT A 6" THICK LAYER OF D.G.A.
 6. PLACE EXPANSION JOINT FILLER ALL AROUND AND AT THE FULL DEPTH OF THE NEW SLAB. REFER TO DETAIL.
 7. SET NEW REBAR & POUR NEW SLAB.
 8. FINISH TO LIGHT BROOM FINISH.
 9. INSTALL JOINT SEALER AT EXPANSION JOINTS.

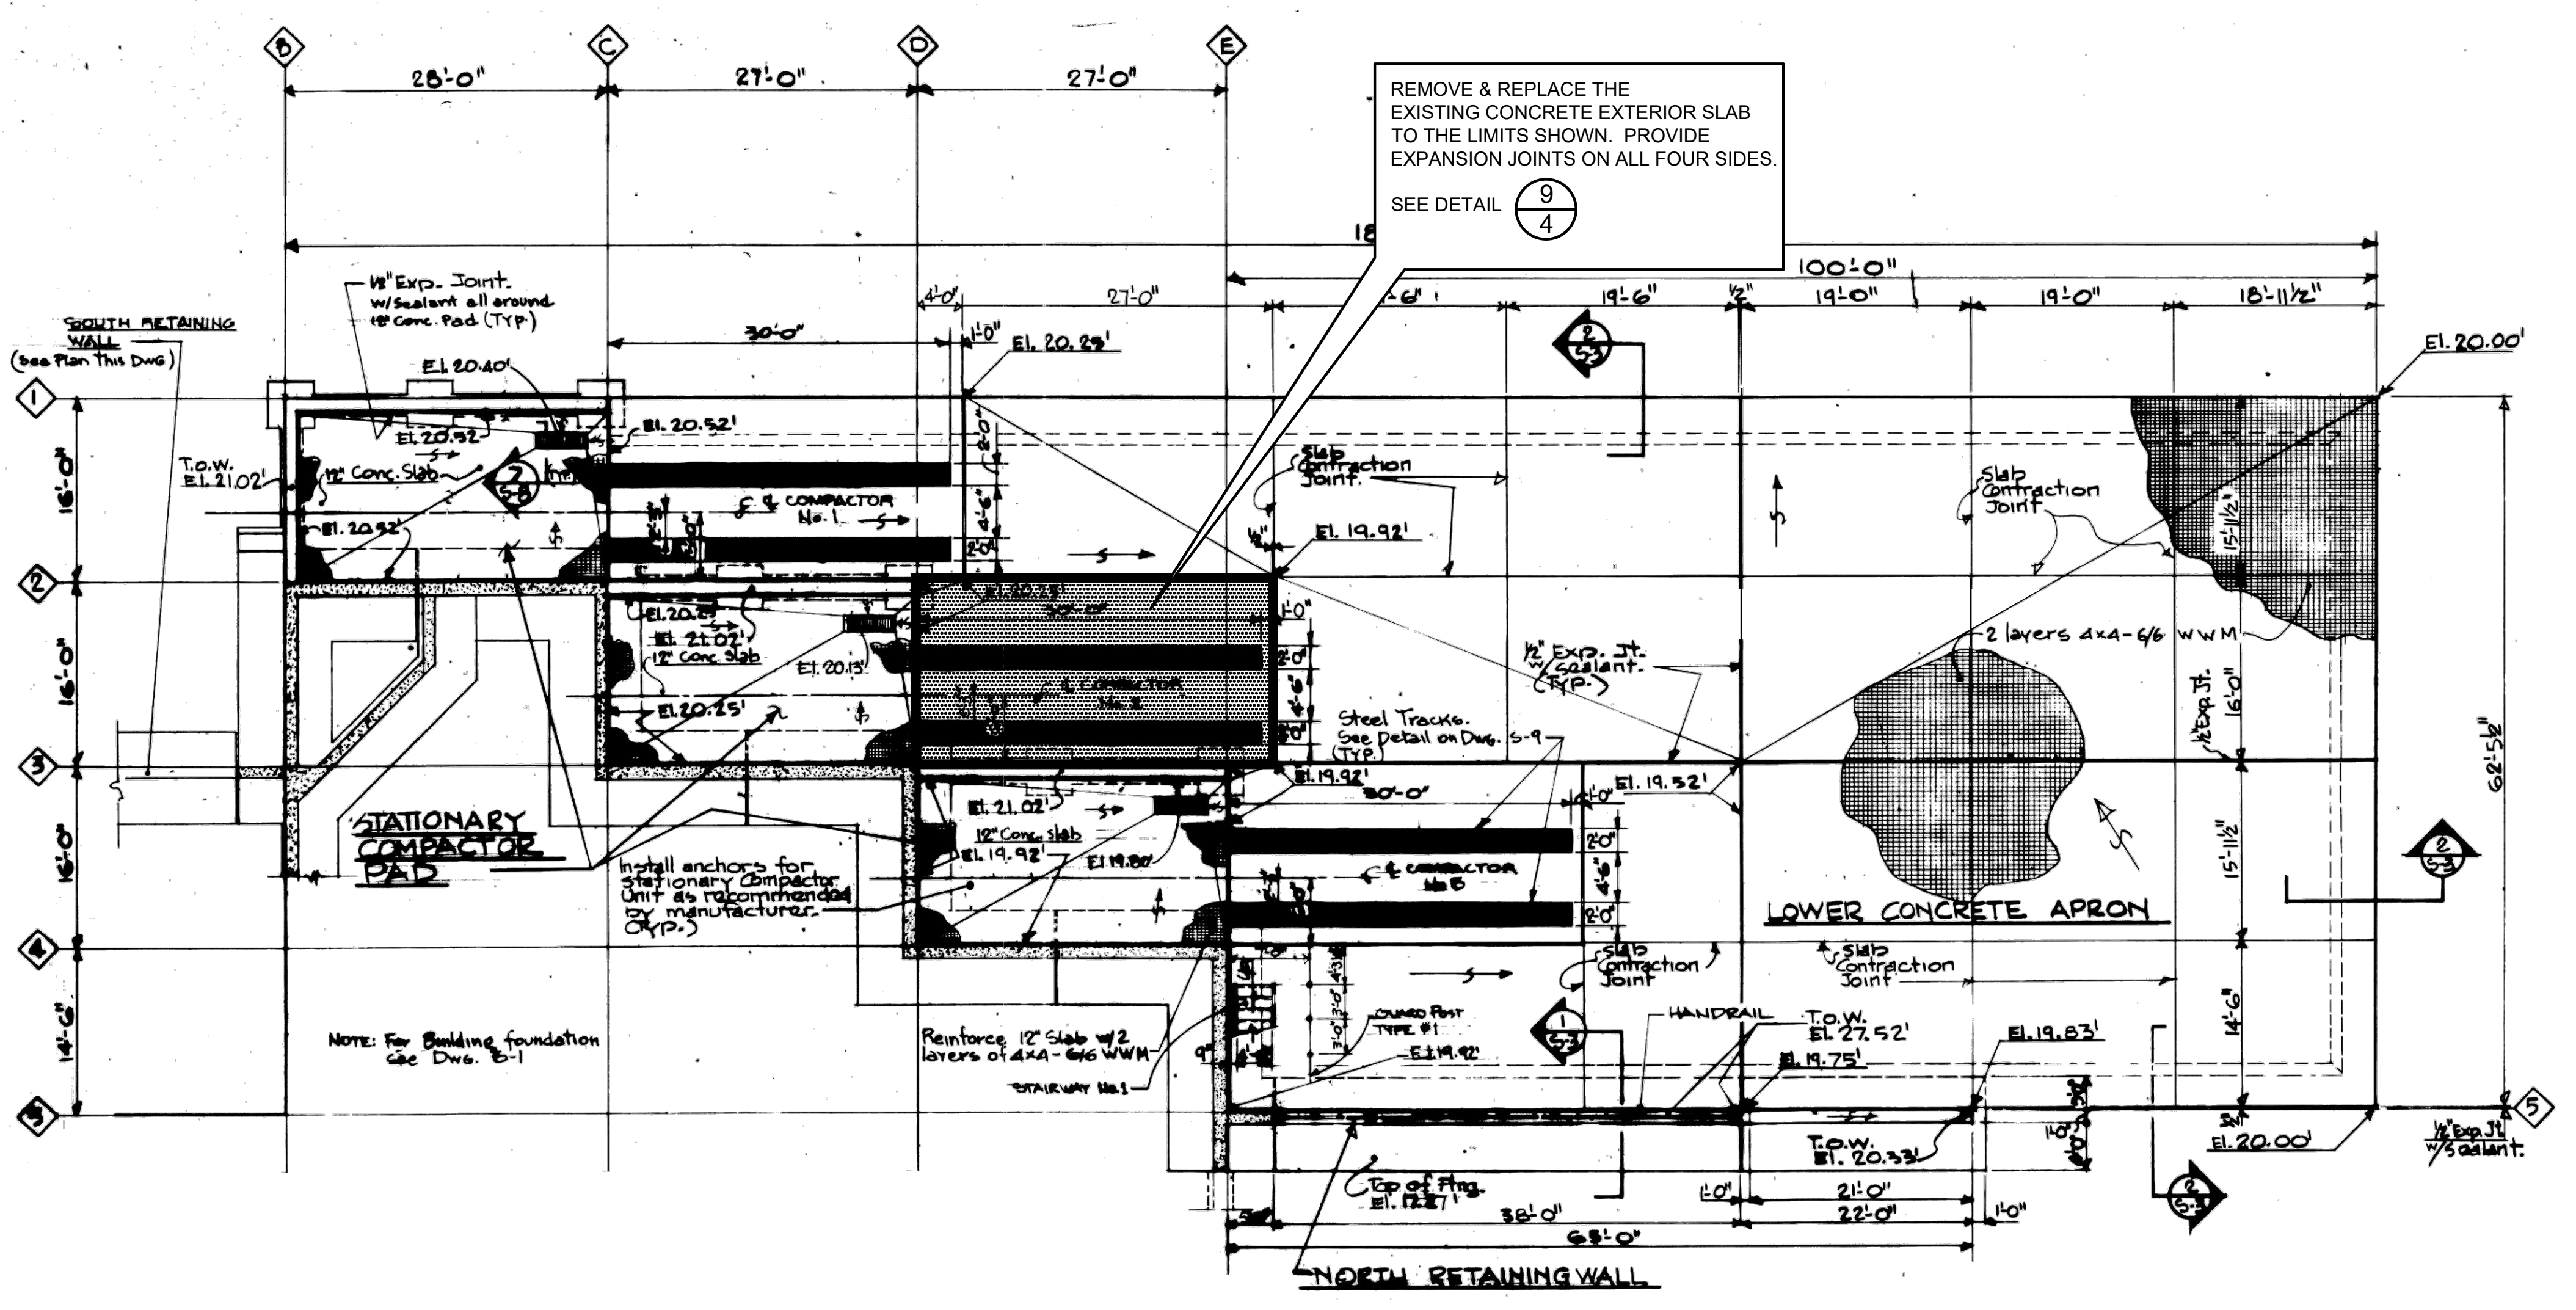

DETAIL 8/4 EXISTING EXTERIOR FLOOR SLAB PLAN
SCALE: 3/16" = 1'-0"

	REVISION	DATE	DESCRIPTION	APPD
	TRANSFER STATION MIDDLE BAY FLOOR AND PUSHWALL REHABILITATION			
	CAPE MAY COUNTY MUNICIPAL UTILITIES AUTHORITY <small>P.O. BOX 610 CAPE MAY COURT HOUSE NEW JERSEY 08210</small>			
	DESIGN: TLR	DRAWN: MMF	PROJECT NO.:	TS-21-22
CHECKED: TLR	APPROVED: TLR	SCALE:	AS SHOWN	
DATE:		DATE:		
THOMAS J. LaROCCO PROFESSIONAL ENGINEER <small>N.J. LIC. NO. 30239</small>		DETAILS, SECTIONS & NOTES		DRAWING NO. 4 OF 4